




Counterclockwise  
for 4x view

Clockwise  
for 2x view

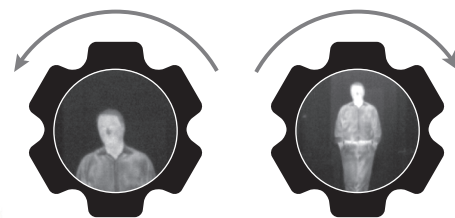

Rotate front lens for  
continuous 2-4x zoom

# Thermal Imager T3™ with Real Optical 2-4x Zoom

T3™ mini-thermal imager offers a robust feature set commonly found in more expensive devices:

- On-board image processing enhancement modes
- Manual and automatic NUC capability
- Photo on-board recording
- USB port with power input and software updates
- Battery read-out and protection
- Auto power-save
- Multiple display views: white hot/black hot/  
NV green/color
- Flexible mounting options: Picatinny rail wrist strap/  
user-handle mount and more

Wide angle units augment law enforcement agency capabilities conducting search operations.

<b>Size (LxWxH)</b>	3.4 x 2 x 1.7 in/ 87 x 51 x 42 mm
<b>Weight</b>	5.3 oz / 150 g
<b>Zoom</b>	2-4x
<b>Field-of-View</b>	28° to 14°
<b>Focus Range</b>	2 yds (m) to infinity
<b>Spectral Range</b>	8-14 micron
<b>Power / Continuous Operation</b>	(1 ea) CR123, 3V / >4hrs
<b>Sensor Resolution</b>	160 x 120 FLIR Lepton 3
<b>Display (diagonal)</b>	1.5 in / 38 mm Color OLED
<b>Operating Temp.</b>	15° to 115° F / -10° to 45° C
<b>Frame Rate/Shutter</b>	9 Hz with shutter
<b>Environmental</b>	IP67

## Range Performance

